




## APPLICATION

SKIDs are the solution to specific process requirements. For example, they can be used to prepare multi-component polymers (potato starch or powder or liquid polyacrylamide base). The constituents can be dosed by weight measurement to guarantee the required precision and traceability. The skids are often made by assembling and adapting TMI products to perform the required client process.

The skid is «made to measure» by definition. It can be different TMI products assembled to the most stringent criteria. It may consist of 3 tanks with CONTIFLOC and a post-dilution system, even an heating system; or it might consist of a holding tank, or even a dozen automated in-line pumps.



# TECHNICAL DATA

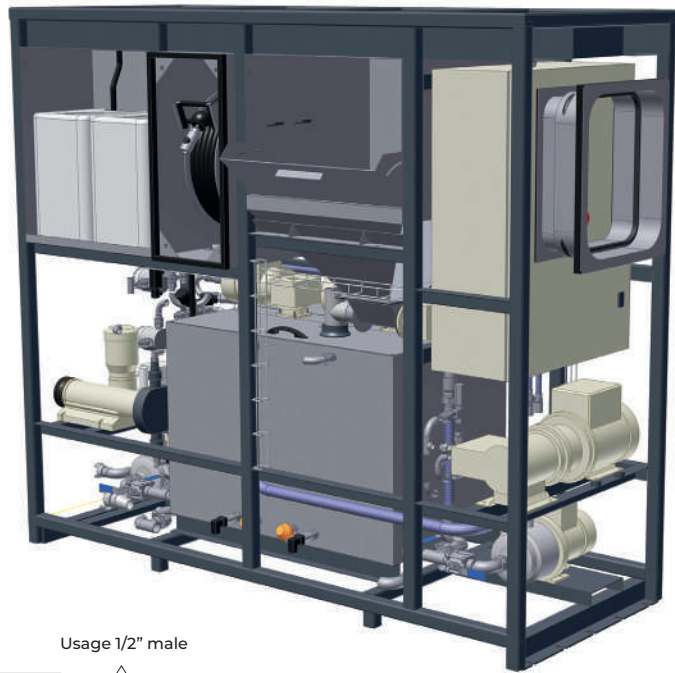

> Drawing for illustration purposes

